

MITSUBISHI LASER DIODES
ML1XX29 SERIES
 FOR OPTICAL INFORMATION SYSTEMS



TYPE
NAME

ML101U29

Sold by LASER66.com

This type is under development. Therefore, please note that this data sheet may be changed without any notice.

DESCRIPTION

ML1XX29 is a high-power, high-efficient AlGaInP semiconductor laser which provides a stable, single transverse mode oscillation with emission wavelength of 660nm and standard pulse light output of 400mW.

ML1XX29 has a real-index-waveguide which improves the slope efficiency (reduction of the operating current) and the astigmatic distance.

Also, ML1XX29 has a window-mirror-facet which improves the maximum output power. That leads to highly reliable and high-power operation at 75 °C.

FEATURES

- High Output Power: 400mW (Pulse)
- High Efficiency: 0.97W/A (typ.)
- Visible Light: 660nm (typ.)
- Low Aspect Ratio ($\theta_{\perp} / \theta_{//}$): 1.5 (typ.)
- Low Astigmatic Distance: $\leq 1\mu\text{m}$ (typ.)

APPLICATION

Portable High-Density Optical Disc Drives
 Re-Writable DVD Drives

ABSOLUTE MAXIMUM RATINGS (Note 1)

Symbol	Parameter	Conditions	Ratings	Unit
Po	Light output power	CW	150	mW
		Pulse(Note 2)	400	
VRL	Reverse voltage	-	2	V
Tc	Case temperature	-	-10 ~ +75	°C
Tstg	Storage temperature	-	-40 ~ +100	°C

Note1: The maximum rating means the limitation over which the laser should not be operated even instant time. This does not mean the guarantee of its lifetime. As for the reliability, please refer to the reliability report issued by Quality Assurance Section, HF & Optical Semiconductor Division, Mitsubishi Electric Corporation.


Note2: TARGET SPEC /Condition Duty Cycle: less than 35%, pulse width: less than 30ns

ELECTRICAL/OPTICAL CHARACTERISTICS (Tc=25°C)

Symbol	Parameter	Test conditions	Min.	Typ.	Max	Unit
Ith	Threshold current	CW	-	85	-	mA
Iop	Operating current	CW, Po=120mW	-	205	-	mA
Vop	Operating voltage	CW, Po=120mW	-	2.35	3.0	V
η	Slope efficiency	CW, Po=120mW	-	0.97	-	mW/mA
λ_p	Peak wavelength	CW, Po=120mW	654	660	664	nm
$\theta_{//}$	Beam divergence angle (parallel)	CW, Po=120mW	7	10.5	12	°
θ_{\perp}	Beam divergence angle (perpendicular)	CW, Po=120mW	14	16	20	°

MITSUBISHI LASER DIODES
ML1XX29 SERIES
 FOR OPTICAL INFORMATION SYSTEMS

OUTLINE DRAWINGS

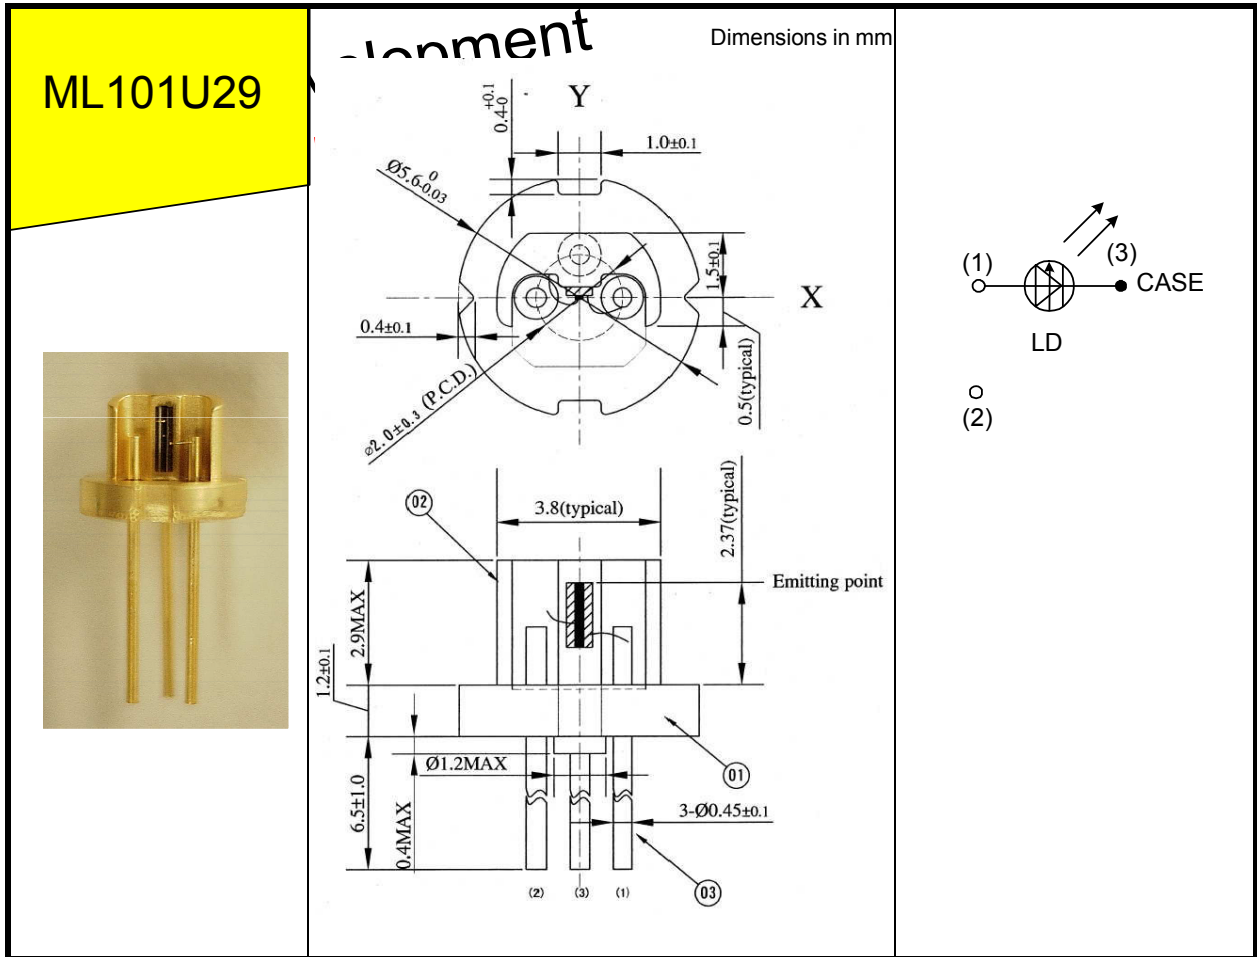

There is no model with a monitor photo diode in ML1XX29 series.



Creative Technology Lasers (925) 210.1330 USA www.LASER66.com

